



Hardware developments IV

E-CAM Deliverable 7.7

Deliverable Type: Report

Delivered in June, 2019



E-CAM

The European Centre of Excellence for
Software, Training and Consultancy
in Simulation and Modelling



Funded by the European Union under grant agreement 676531

Project and Deliverable Information

| | |
|------------------------------|--|
| Project Title | E-CAM: An e-infrastructure for software, training and discussion in simulation and modelling |
| Project Ref. | Grant Agreement 676531 |
| Project Website | https://www.e-cam2020.eu |
| EC Project Officer | Juan Pelegrín |
| Deliverable ID | D7.7 |
| Deliverable Nature | Report |
| Dissemination Level | Public |
| Contractual Date of Delivery | Project Month 44(31 st May, 2019) |
| Actual Date of Delivery | 25 th June, 2019 |
| Description of Deliverable | Update on "Hardware Developments III" (Deliverable 7.5) which covers: <ul style="list-style-type: none"> - Report on hardware developments that will affect the scientific areas of interest to E-CAM and detailed feedback to the project software developers (STFC); - discussion of project software needs with hardware and software vendors, completion of survey of what is already available for particular hardware platforms (CNRS); and, - detailed output from direct face-to-face session between the project end-users, developers and hardware vendors (ICHEC). |

Document Control Information

| | | |
|------------|-------------------|---|
| Document | Title: | Hardware developments IV |
| | ID: | D7.7 |
| | Version: | As of June, 2019 |
| | Status: | Accepted by WP leader |
| | Available at: | https://www.e-cam2020.eu/deliverables |
| | Document history: | Internal Project Management Link |
| Review | Review Status: | Reviewed |
| Authorship | Written by: | Alan Ó Cais(JSC) |
| | Contributors: | Jony Castagna (STFC), Godehard Sutmann (JSC) |
| | Reviewed by: | Jony Castagna (STFC) |
| | Approved by: | Godehard Sutmann (JSC) |

Document Keywords

| | |
|-----------|--|
| Keywords: | E-CAM, HPC, Hardware, CECAM, Materials |
|-----------|--|

25th June, 2019

Disclaimer: This deliverable has been prepared by the responsible Work Package of the Project in accordance with the Consortium Agreement and the Grant Agreement. It solely reflects the opinion of the parties to such agreements on a collective basis in the context of the Project and to the extent foreseen in such agreements.

Copyright notices: This deliverable was co-ordinated by Alan Ó Cais¹ (JSC) on behalf of the E-CAM consortium with contributions from Jony Castagna (STFC), Godehard Sutmann (JSC). This work is licensed under the Creative Commons Attribution 4.0 International License. To view a copy of this license, visit:

<http://creativecommons.org/licenses/by/4.0>



¹a.ocais@fz-juelich.de

Contents

| | |
|---|-----------|
| Executive Summary | 1 |
| 1 Introduction | 2 |
| 1.1 Scope of Deliverable | 2 |
| 1.1.1 Target Audience | 2 |
| 1.2 Extent of the update to <i>Hardware Developments III</i> | 2 |
| 2 Hardware Developments | 3 |
| 2.1 Influential factors | 3 |
| 2.1.1 The impact of power considerations | 3 |
| 2.1.2 The impact of Deep Learning | 4 |
| 2.1.3 Intellectual Property Origin | 4 |
| 2.2 Notable Hardware Developments | 4 |
| 2.2.1 European Processor Initiative | 4 |
| 2.2.2 The <i>Frontier</i> Supercomputer | 5 |
| 2.2.3 Intel X ^e Architecture | 5 |
| 2.2.4 EuroEXA | 5 |
| 2.2.5 Feedback for software developers | 5 |
| 2.3 Extreme-scale resources at the European level | 6 |
| 2.3.1 EuroHPC | 6 |
| 2.3.2 Current PRACE Resources | 6 |
| 2.3.3 Feedback for software developers | 6 |
| 3 Software Needs | 8 |
| 3.1 Software needs as collected by the E-CAM Software Survey | 8 |
| 3.1.1 Feedback for hardware and software vendors | 10 |
| 3.2 Programming Paradigms | 10 |
| 3.2.1 C++17 | 10 |
| 3.2.2 Fortran 2018 | 10 |
| 3.2.3 The (potential) role of Python | 11 |
| 3.2.4 Open Standards | 11 |
| 3.2.5 Runtime System Approaches | 12 |
| 3.2.6 Feedback for software developers | 13 |
| 4 Interactions between end-users, developers and vendors | 14 |
| 4.1 Outcomes and key recommendations from the <i>E-CAM Extreme-Scale State-of-the-Art Workshop</i> | 14 |
| 4.2 The European exascale roadmap | 14 |
| 4.2.1 FocusCoE | 16 |
| 4.2.2 Other discussions with hardware and software vendors | 16 |
| 4.3 WP7 Pilot Projects | 16 |
| 4.3.1 High Throughput Computing (HTC) in E-CAM | 16 |
| 4.3.2 A Load-balancing Library | 17 |
| 4.3.3 Leveraging HPX within E-CAM | 17 |
| 4.4 Feedback for software developers | 18 |
| A E-CAM Extreme-Scale State-of-the-Art Workshop, 6-7 July 2017 Barcelona | 19 |
| A.1 Emerging hardware architectures relevant to exascale computing (in 2017) | 19 |
| A.1.1 The DEEP projects – overview of the architecture | 19 |
| A.1.2 The Mont-Blanc projects | 20 |
| A.2 Exascale challenges in exploiting massive parallelism | 20 |
| A.2.1 "Large scale electronic structure calculations with CP2K" - Jurg Hutter | 20 |
| A.2.2 "Scalability of Path Sampling Simulations" – David Swenson | 21 |
| A.2.3 "PaPIM: A Code for (Quantum) Time Correlation Functions" – Momir Malis | 22 |
| A.2.4 "Porting DL_MESO_DPD on GPUs" – Jony Castagna | 22 |
| A.2.5 "MP2C: Multiple-particle collision dynamics on massively parallel computers" – Godehard Sutmman | 23 |
| A.2.6 "POP – understanding applications and how to prepare for exascale" – Jesus Labarta | 23 |
| A.2.7 "Exascale challenges: the view from MaX" – Carlo Cavazzoni | 24 |
| A.2.8 "Exascale challenges: the view from NoMAD" – Claudia Draxl | 25 |
| A.2.9 "Exascale challenges: the view from EoCoE" – Matthieu Haefele | 25 |

List of Figures

| | | |
|----|---|----|
| 1 | Factors that will influence the challenges in HPC over the coming decade (©Eurolab4HPC) | 3 |
| 2 | List of PRACE Resources (as of 2018) with associated hardware characteristics. | 7 |
| 3 | Question: Who develops the software? | 8 |
| 4 | Question: The Programming Language used by the software. | 8 |
| 5 | Supported (parallel) software capabilities | 9 |
| 6 | Most common hardware used for generating publication-quality results | 9 |
| 7 | Max number of cores used per run | 9 |
| 8 | Max number of hours used per run | 9 |
| 9 | The European HPC Technology Projects within the European HPC Eco-system. | 15 |
| 10 | The DEEP hardware architecture. | 19 |
| 11 | CP2K Presentation: GPU and KNL Performance | 21 |
| 12 | DL_MESO: GPU porting results | 22 |
| 13 | MP2C scaling on JUGENE | 23 |
| 14 | POP: Different software layers | 24 |
| 15 | Fundamental performance factors in evaluating performance | 24 |
| 16 | Overview of materials data and their structure | 25 |
| 17 | EoCoE Performance metrics table | 26 |

Executive Summary

This deliverable is a update on *Hardware developments III*[1] which was submitted as D7.5 in the second reporting period of the project. Based on the perceived needs of our user community, the deliverable is composed of 3 main parts, namely:

- *Hardware Developments* (Section 2) which provides a summarised update to Hardware Developments that we see as relevant to the E-CAM community in the 3-5 year horizon. In this section, roadmaps of HPC development, power considerations, hardware developments of particular significance are presented, as well as the current and expected availability of extreme-scale resource at the European level. Detailed feedback to E-CAM software developers is also given covering topics such as: using several development approaches such as CUDA, OpenACC, OpenMP to exploit the full power of GPUs, FPGAs and many-core architectures. It is fundamental to consider the several issues related the heterogeneity of exascale architectures, such as CPU-GPU bandwidth communication. The technologies described in this section are very likely to feature in any available European exascale technologies.
- *Software Needs* (Section 3) gives an update to the software needs of the project and what will be required of the software extreme-scale resources. In this section, an analysis of the ongoing "E-CAM Survey of Application Software" is provided. Feedback for hardware and software vendors is given, noting in particular that there is still a heavy reliance in the community on Fortran and support for this language will be essential on future systems for current workloads. A subset of possible programming paradigms are covered: C++17, Fortran 2018, several Open Standards (MPI/OpenMP/OpenACC/OpenCL) and runtime-system approaches (HPX/Kokkos/OmpSs/Charm++). For software developers, awareness of the latest standards and the status of their implementations are critical during application development as these new features exist to target the scalability challenges on modern systems. We provide a limited set of recommendations for people in E-CAM community who are embarking on a new software project: using MPI+OpenMP with their latest standards remains the safest bet with good performance and scalability achievable; you can prototype quickly using Python and leveraging the Python APIs to the libraries you need; using C++ with Python interfaces can help achieve maximal performance (and it helps that computer scientists seem to prefer C++ when creating innovative runtime systems).
- *Interactions between end-users, developers and vendors* (Section 4) describes the face-to-face discussions that have taken place between E-CAM developers users and the hardware and software vendors. This section reflects the E-CAM Extreme-Scale State-of-the-Art Workshop held in Barcelona in June 2017 as well as the interaction of the project with ETP4HPC, EuroHPC and EU hardware projects (in particular via the CoE coordination project FocusCoE). The European exascale roadmap, emerging hardware architectures relevant to exascale computing and exascale challenges in exploiting massive parallelism are reported in this section. Key outcome and recommendations include: E-CAM needs to develop niche activities to provide mutual benefit for both our industry partners and E-CAM's HPC oriented goals. We should provide a reliable software delivery mechanism between academic software developers and industrial partners. We also seek to increasing the E-CAM community exposure to HPC technologies by organising a set of pilot projects covering High Throughput Computing (HTC), load-balancing and novel runtime technologies. In order to achieve E-CAM's internal goals, additional steps are to be taken: enhancing collaboration with EoCoE, POP and PRACE to optimise the quality of the E-CAM modules developed; transversal ESDW workshop can be organised with the goal of increasing synergy between WPs while ensuring that E-CAM developers are on similar levels in terms of parallel code development skills; and increase the impact of the modules developed by E-CAM community by publishing pilot project webpages.

Discussions are also realised with hardware/software vendors through our participation in the development of the ETP4HPC Strategic Research Agenda and our participation in the EuroHPC Working Group on User Requirements.

1 Introduction

1.1 Scope of Deliverable

This deliverable is divided into 3 main parts, namely:

- Analysis of hardware developments expected in the 3-5 year horizon with feedback to software developers (Section 2);
- Survey of software and hardware currently used by the E-CAM community (and the level of parallelisation used). Analysis of software future needs and requirements with feedback to software developers, as well as hardware and software vendors (Section 3);
- Discussion of project software needs with hardware and software vendors, and detailed output from direct face-to-face session between the project end-users, developers and hardware vendors (Section 4).

1.1.1 Target Audience

The recommendations of this deliverable are targeted at the development community connected to E-CAM. We highlight the impact that immediate hardware developments are likely to have on the software applications of the E-CAM community. We also provide a set of recommendations to our user community with respect to how to prepare for, and deal with, these developments.

In addition, our software survey, in particular, provides hardware and software vendors with valuable insight into the normal simulation software and practices of our user community.

1.2 Extent of the update to *Hardware Developments III*

In E-CAM's *Hardware Developments III* deliverable [1], we maintained a focus on the disruptive aspects of the hardware and software technologies that are most likely to impact the software development practices of the E-CAM community.

The current deliverable maintains a similar structure to the previous deliverable with updates to reflect the state of the art. Significant additions include

- the addition of the European Processor Initiative,
- the resurgence of AMD,
- the Intel X^e Architecture,
- further details on the EuroHPC joint undertaking and the related hardware developments,
- the Kokkos runtime,
- updates on the WP7 pilot projects.

As per Task 3 of WP7, we are expected to provide 2 feedback sessions where the software, developed within the project is presented to a combined audience of users and hardware vendors. The first of these was held in RP2 and remains unchanged in the current deliverable (reported in detail in Section 4). We expect to hold the second of these sessions in RP4. In addition, we had a booth at [PASC18](#).

2 Hardware Developments

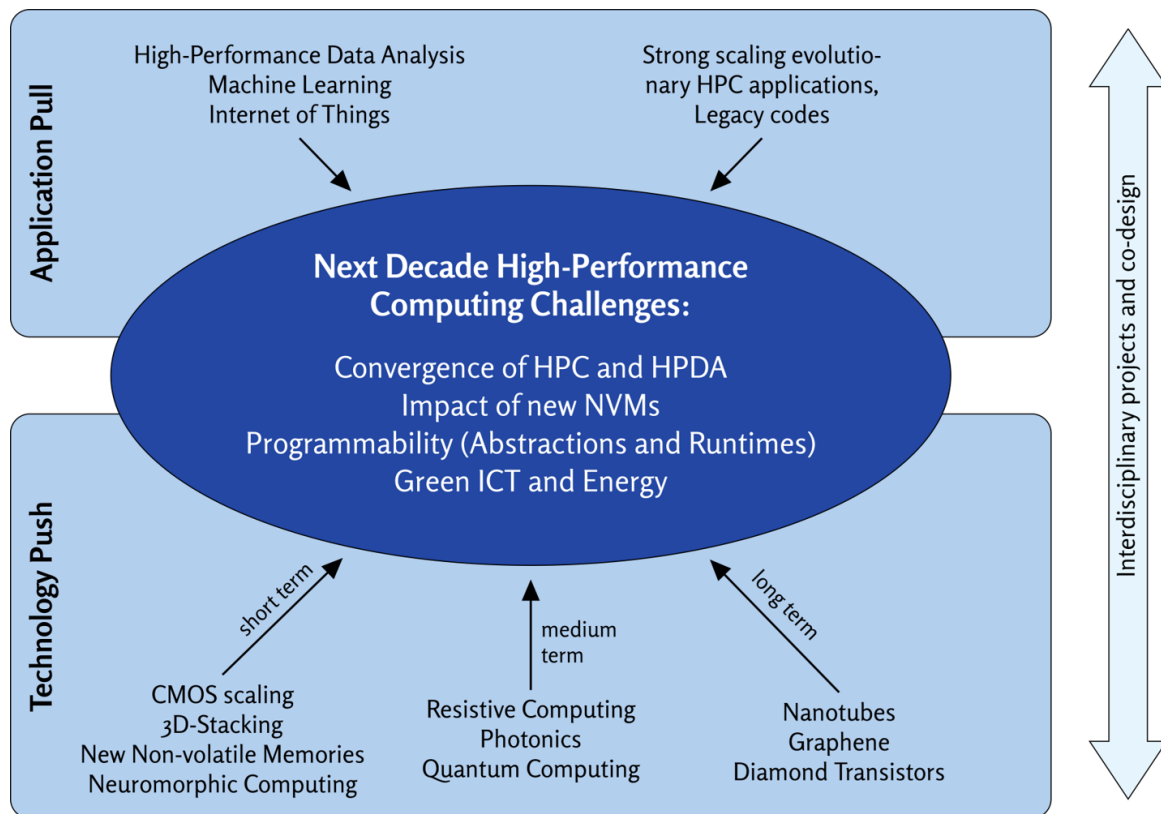


Figure 1: Factors that will influence the challenges in HPC over the coming decade (©Eurolab4HPC)

There are a number of different organisations and projects that are generating roadmaps about the current and future technologies that are (or may be in the future) available in the High Performance Computing (HPC) space. A summary table of which had been created by Eurolab-4-HPC for their report on the "[Eurolab4HPC Long-Term Vision on High-Performance Computing](#)", including summary input from projects such as PRACE, ETP4HPC, HiPEAC, BDVA and others.

The Eurolab4HPC Vision will be continued with a planned new Vision release in January 2020 and a graphic they created already highlights the factors that influence this document (reproduced in Fig. 1). In this section we will focus on a small subset of the content of these roadmaps (primarily from Eurolab4HPC and ETP4HPC) that are most likely to impact the target community of E-CAM in the 3-5 year horizon.

2.1 Influential factors

There are a number of economical factors that will have a strong influence on aspects of the hardware that will be realised in exascale machines. We discuss two here: the practical consideration of the power budget required to run such a resource and the market-led influence of deep learning on *commodity* hardware that can be leveraged.

2.1.1 The impact of power considerations

For the last decade, power and thermal management has been of high importance. The entire market focus has moved from achieving better performance through single-thread optimizations, e.g., speculative execution, towards simpler architectures that achieve better performance per watt, provided that vast parallelism exists. The HPC community, particularly at the higher end, focuses on the flops/watt metric since the running cost of high-end HPC systems are so significant. It is the potential power requirements of exa-scale systems that are the limiting factor (given currently available technologies). The practical outcome of this is the rise of accelerating co-processors and many-core systems. In the following sections we will mention such technologies in the context of relevant international exa-scale projects. The problem with the current two-pronged advance is that it is not always easy to develop parallel programs for these technologies and, moreover, those parallel programs are not always performance portable between each technology (particularly since FPGAs use a data-flow programming model), meaning that each time the architecture

(or indeed the vendor) changes, the code may have to be rewritten. While there may be open standards available for each technology, each product currently has different preferred standards which are championed by the individual vendors (and therefore the best performing).

In general, we see a clear trend towards more complex systems, which is expected to continue over the next decade. These developments will significantly increase software complexity, demanding more and more intelligence across the programming environment, including compiler, run-time and tool intelligence driven by appropriate programming models. Manual optimisation of the data layout, placement, and caching will become uneconomic and time consuming, and will, in any case, most likely soon exceed the abilities of the best human programmers.

2.1.2 The impact of Deep Learning

Traditional machine learning uses handwritten feature extraction and modality-specific machine learning algorithms to label images or recognize voices. However, this method has several drawbacks in both time-to-solution and accuracy. Today's advanced deep neural networks use algorithms, big data, and the computational power of the GPU (and other technologies) to change this dynamic. Machines are now able to learn at a speed, accuracy, and scale that are driving true artificial intelligence and AI Computing.

Deep learning is used in the research community and in industry to help solve many big data problems such as computer vision, speech recognition, and natural language processing. Practical examples include:

- Vehicle, pedestrian and landmark identification for driver assistance
- Image recognition
- Speech recognition and translation
- Natural language processing
- Life sciences

The influence of deep-learning on the market is significant with the design of *commodity* products such as the Intel MIC (causing Intel to rethink its strategy with this architecture) and NVIDIA Tesla being heavily impacted. The market is so significant that the new AMD Instinct GPUs target it as a primary market.

Silicon is being dedicated to deep learning workloads and the scientific workloads for these products will need to adapt to leverage this silicon.

2.1.3 Intellectual Property Origin

In modern high technology economies access to Intellectual Property (IP) is crucial. When IP is concentrated in a region, such as it is with computing technologies, the potential exists that access to this IP may be precarious, or simply expensive. It is economically important for large regions to have access to multiple sources of IP (for competitive pricing) and to try to generate their own critical IP (to guarantee access). The consequences of this can be seen in China with the development of their own line of x86 compatible CPUs, in Japan with their investment in ARM technologies and the EU with the European Processor Initiative (EPI).

2.2 Notable Hardware Developments

In previous iterations of this deliverable (see [2, 3, 1]), we have in this section provided lists of available hardware and platforms that are, or will be, accessible to E-CAM developers. In the current iteration we no longer try to be exhaustive but focus more on particular developments that may be of significant potential impact to our user community.

We continue to add increasing importance to Section 3 which attempts to identify software solutions that may help insulate E-CAM developers from an increasingly diverse computing environment over which they do not ultimately have a lot of control.

2.2.1 European Processor Initiative

The EPI is a project currently implemented under the first stage of the Framework Partnership Agreement signed by the Consortium with the European Commission, whose aim is to design and implement a roadmap for a new family of low-power European processors for extreme scale computing, High Performance Data Analysis (HPDA) and a range

of emerging applications. Focus will be placed on integration technologies to allow the creation of a General Purpose Processor (GPP) (over multiple generations with increasing levels of IP generation).

The accelerator stream will develop and demonstrate fully European processor IPs based on the [RISC-V](#) Instruction Set Architecture, providing power efficient and high throughput accelerator tiles within the GPP chip. Using RISC-V allows leveraging open source resources at hardware architecture level and software level, as well as ensuring independence from non-European patented computing technologies.

2.2.2 The *Frontier* Supercomputer

The [announcement of 1.5 exaflop "Frontier" exascale system](#) to be installed at Oak Ridge National Laboratory has a goal of being the most powerful supercomputer in 2021. It highlights the resurgence of AMD and their potential to compete with the Intel architectures (see 2.2.3 below) of the Aurora A21 exascale machine at Argonne National Labs.

2.2.3 Intel X^e Architecture

Intel is attempting to create serious competition for (the currently dominant) NVIDIA in the accelerator space with the recently announced [Intel X^e architecture](#) scheduled for release in 2020. The strong selling point is that they can provide an accelerated computing ecosystem to rival CUDA (which is something that AMD technologies cannot really currently do). The technology is also the workhorse of the [Aurora A21 exascale system](#).

2.2.4 EuroEXA

Field Programmable Gate Arrays (FPGAs) are semiconductor devices that are based around a matrix of configurable logic blocks (CLBs) connected via programmable interconnects. FPGAs can be reprogrammed to desired application or functionality requirements after manufacturing. This feature distinguishes FPGAs from Application Specific Integrated Circuits (ASICs), which are custom manufactured for specific design tasks.

EuroEXA is an EU Funded 20 Million Euro for an [ARM+FPGA Exascale Project](#) which will lead Europe towards exascale, together with [ExaNeSt](#), [EcoScale](#) and [ExaNoDe](#) projects, scaling peak performance to 400 PFLOP in a peak system power envelope of 30MW; over four times the performance at four times the energy efficiency of today's HPC platforms.

2.2.5 Feedback for software developers

Extreme computing and AI are currently global issues and key components of global economies and global security. It is not surprising then to see competition increase in such a huge (and growing) market. The unfortunate end result for a scientific developer is that there is no developer ecosystem that can leverage all of this diverse hardware.

Several approaches have been developed to exploit the full power of accelerators: from parallel computing platform and application programming interface specific for NVidia GPUs, like [CUDA 10.0](#), to the latest version of [OpenMP 5.0](#) which contains directives to offload computational work from the CPU to the GPU. While CUDA currently is likely to achieve best performance from an NVidia device, OpenMP allows for better portability of the code across different architectures. Finally, the [OpenACC open standard](#) is an intermediate between the two, more similar to OpenMP than CUDA, but allowing better usage of the GPU. Developers are strongly advised to look into these language paradigms.

Moreover, it is fundamental to consider there the several issues linked to hybrid architectures. In the case of a GPU we have CPU-GPU and GPU-GPU bandwidth communication, direct access through [Unified Virtual Addressing](#) and the presence of new APIs for programming (such as [Tensor Core](#) multiplications specifically designed for deep learning algorithms).

At this stage, accelerator programming is quite mainstream and there are many training courses available online, see for example the [NVidia education site](#) for material related to CUDA and OpenACC. Material for OpenMP is more limited, but as an increasing number of compilers begin to support the OpenMP 5.0 standard, we expect the amount of such material to grow (see this [presentation on performance of the Clang OpenMP 4.5 implementation on NVIDIA gpus](#) for a status report as of 2016).

FPGAs use a dataflow based programming model, a programming paradigm that models a program as a directed graph of the data flowing between operations. Despite their high efficiency in performance and power consumption, FPGA are known for being difficult to program.

In the EuroEXA project one of the partners is Maxeler who provide hardware systems that combine conventional CPUs with high performance Dataflow Engines (DFEs) built around Field Programmable Gate Array (FPGA) chip technology. The application design process using Maxeler technologies is described very well by [EoCoE](#) in a [June 2018 webinar on FPGA computing](#).

In general, the current FPGA environment is similar to the GPU space some years ago in that HPC is not the primary market but could be a significant one. There is no common standard being championed to improve their programmability, so choosing one or the other vendor locks the user into a particular development platform (to some extent).

Overall, the hardware is growing in diversity and unfortunately there is no API that is going to allow you to program for all of them. It's for this reason that we focus on viable "middle-men" in Section 3.

2.3 Extreme-scale resources at the European level

2.3.1 EuroHPC

As part of the [EU HPC policy](#), a multi-government agreement (20 as of June 2018) has been signed to acquire and deploy, by 2022/2023, a pan-European integrated exascale supercomputing infrastructure: [EuroHPC](#). It will address three urgent needs:

- to procure and deploy in Europe in competitive timeframes a world-class pre-exascale HPC infrastructure;
- to make it available to public and private users for developing leading scientific and industrial applications;
- to support the timely development of the next generation European HPC technologies and their integration into exascale systems in competitive timeframes with respect to our world competitors.

With a total budget of approximately EUR 1 billion, the Joint Undertaking will function until 2026. The Joint Undertaking aims by 2023 to deploy at least one exascale system based on European technology and in June 2019 selected the [Hosting Entities for Precursors to Exascale Supercomputers](#). The decision was taken in the meeting of the Governing Board of the EuroHPC Joint Undertaking, in Luxembourg, on June 7 2019, where three different hosting sites for pre-exascale systems were selected: Bologna (Italy), Barcelona (Spain) and Kajaani (Finland). The call for [Hosting Entities for Petascale Supercomputers](#) will also soon be announced.

E-CAM is participating in the EuroHPC Working Group on User Requirements, submitting a position paper to the Group in June 2018 and attending an associated workshop.

2.3.2 Current PRACE Resources

As far as the Partnership for Advanced Computing in Europe (PRACE) initiative is concerned, the complete list of available resources are shown in Figure 2.

Access to PRACE resources can be obtained by application to the [PRACE calls](#).

Moreover, the Distributed European Computing Initiative (DECI) is designed for projects requiring access to resources not currently available in the PI's own country but where those projects do not require resources on the very largest (Tier-0) European Supercomputers or very large allocations of CPU. To obtain resources from the DECI program, applications should be made via the [DECI calls](#).

2.3.3 Feedback for software developers

While it is still too early to know the hardware technology content of the EuroHPC, the technologies described already are very likely to feature in the precursors. Practically speaking one must then consider the software implementation implications, something that is covered in some detail in Section 3.2.

| | | <i>HAWK</i> | <i>JOLIOT CURIE AMD</i> | <i>JOLIOT CURIE SKL</i> | <i>JOLIOT CURIE KNL</i> | <i>JUWELS</i> | <i>Marconi Broadwell⁽¹⁾</i> | <i>Marconi KNL⁽²⁾</i> | <i>Mare Nostrum4</i> | <i>Piz Daint</i> |
|--------------------|--------------------------------|-----------------------------|---------------------------------|---|------------------------------------|---|--|--|--|--|
| System Type | | HPE | Bull Sequana | Bull Sequana | Bull Sequana | Bull Sequana | Lenovo System NeXtScale | Lenovo System Adam Pass | Lenovo | Hybrid Cray xC50 |
| Compute | Processor type | AMD Epyc Rome | AMD Epyc Rome | Intel Xeon Platinum 8168 2.7 GHz | Intel Knights Landing | Intel Xeon Skylake Platinum 8168 | Intel Broadwell | Intel Knights Landing | Intel Xeon Platinum 8160 2.1 GHz | Intel® Xeon® E5- 2690 v3 @ 2.60GHz (12 cores) |
| | Total nb of nodes | 5 000 | 2 292 | 1 656 | 828 | 2 511 | 720 | 3 600 | 3 456 | 5 704 |
| | Total nb of cores | 640 000 | 293 376 | 79 488 | 52 992 | 120 528 | 25 920 | 244 800 | 165 888 | 68 448 |
| | Nb of accelerators /node | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. | 1 GPU per node |
| | Type of accelerator | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. | n.a. | NVIDIA® Tesla® P100 16GB |
| Memory | Memory / Node | 128 GB | 256 GB | 192 GB | 96 GB DDR4 + 16 GB MCDRAM | 96 GB | 128 GB - DDR4 | 96 GB – DDR4 + 16 GB - MCDRAM | 96 GB (200 nodes with 384GB) | 64 GB |
| Network | Network Type | Infiniband HDR | Infiniband HDR 100 | Infiniband EDR | BULL BXI | InfiniBand EDR | Intel Omni- Path Architecture 2:1 | Intel Omni- Path Architecture 2:1 | Intel Omni-Path Architecture | Cray Aries |
| | Connectivity | 9D enhanced Hypercube | Dragonfly+ | Fat Tree | Fat Tree | Fat Tree | Fat Tree | Fat Tree | Fat Tree | Dragonfly |

Figure 2: List of PRACE Resources (as of 2018) with associated hardware characteristics.

3 Software Needs

While the original scope of this section was intended to collect information from the E-CAM community that could be relayed back to hardware and software vendors, it is clear that the hardware developments described in Section 2 will greatly impact the software development practices of the E-CAM development community. For this reason, we go beyond this original scope and in addition we highlight the language standards, runtime environments, workflows and software tools that can help E-CAM developers to deliver high quality, resilient software for current and next generation machines.

3.1 Software needs as collected by the E-CAM Software Survey

The [E-CAM Survey of Application Software](#) was created to collect basic information about the software, libraries and applications that are frequently used by people in the extended CECAM community, with a view to trying to develop a support infrastructure for heavily-used software within E-CAM. It includes questions about the application; scientific area; parallelization techniques; the users familiarity with, and capabilities of, the application; the sizes of users typical resource requirements; and finally whether they are a user or developer of the application.

The survey was circulated to our complete set of mailing lists (including industrialists) and is distributed to all Extended Software Development Workshop (ESDW) participants. It is also available on the homepage of [CECAM website](#) since April 2017. To date, we have received 160 responses with 67 distinct application codes listed (154 are included in the analysis here). We are conscious that the responses related to the survey may not sufficient to be representative of the entire community since many of the responses are received following direct requests during events held by E-CAM.

Fig.3 shows that more than 54% of them simply *use* a open-source community code, while about 20% of them are open-source code developers with about 14% of them using a commercial code.

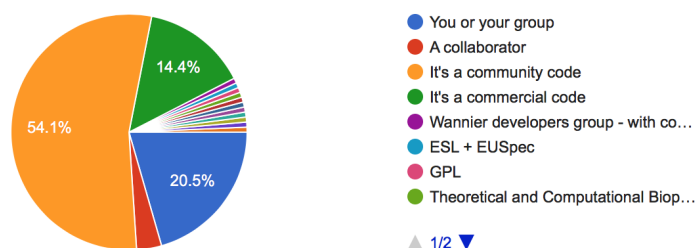


Figure 3: Question: Who develops the software?

Fig.4 shows that ~75% of the software of the survey is written in Fortran, with about ~36% in C/C++ and a further 24% using Python (or Python bindings).




Figure 4: Question: The Programming Language used by the software.

Fig.5 shows that three quarter of the respondees use a code with an MPI implementation and half with an OpenMP implementation. About 40% of them are under Hybrid MPI/OpenMP mode. GPU capabilities are available to 45% of the applications.

Fig.6 shows that 89% of respondees get their publication-quality results through the use of resources at HPC centres.

Fig.7 shows that almost half them use less than 128 cores for simulation and less than one quarter of them use 1024 cores or beyond. This clearly indicates that only a small subset of respondees have requirements that potentially extend to extreme-scale resources (although the potential use case for High Throughput Computing was not included in the questionnaire and will be added in the next iteration).

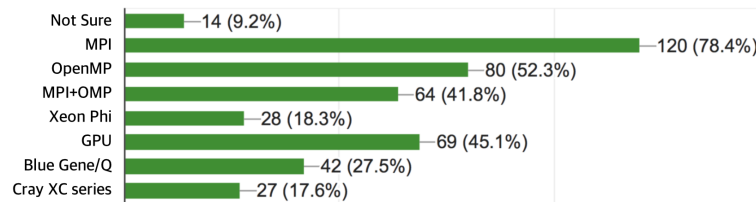


Figure 5: Supported (parallel) software capabilities

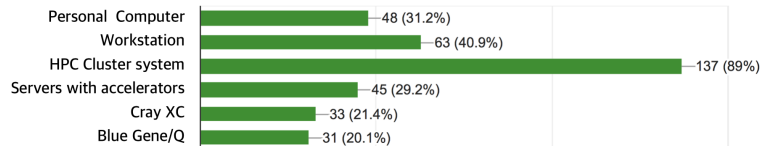


Figure 6: Most common hardware used for generating publication-quality results

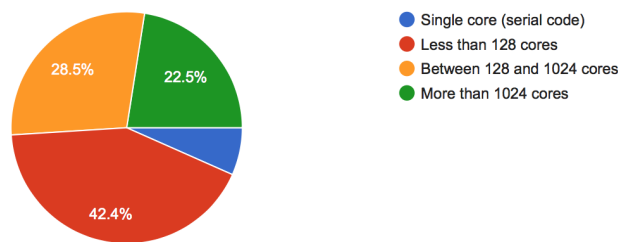


Figure 7: Max number of cores used per run

Fig.8 shows that more than 80% of them get their jobs finished within 24 hours (or have restart capabilities in the application).

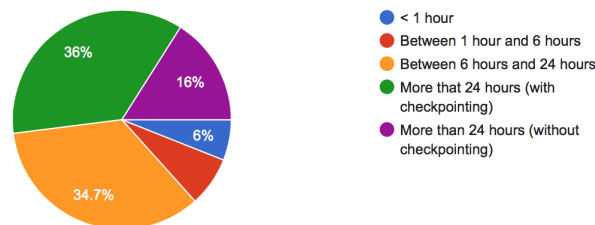


Figure 8: Max number of hours used per run

While the survey is still not large enough to draw strong conclusions, we can extract some trends with respect to the **softwares needs** of the E-CAM community:

- Most of the users use open-source community codes and don't necessarily have the capacity to maintain/develop them. The needs for commercial codes represent only a small portion of the community.
- Since the majority of the codes included are written with Fortran, any contributions that our community make to these codes will necessarily have to be written in Fortran. However, the development and use of Python bindings becomes increasingly popular. Teaching the community how to use (and create) efficient Python bindings and using Python for non-performance-critical components of their workflow should be very helpful for the community (and also ease any future transition to other programming models).
- MPI, OpenMP, GPU (CUDA/OpenACC) are the main techniques currently used to enable code parallelisation. Training in these techniques, in particular targeting "accelerator" technologies, are needed.
- About 90% of them use HPC centres for producing science. Guiding them to get access to PRACE resources should be very helpful *but* the scalability of their resource requirements will need to be demonstrated. Given that *ensemble* calculations are very common across E-CAM, the inherent scalability of such workflows need to be emphasised to the community.

3.1.1 Feedback for hardware and software vendors

As the survey currently stands (and the results should be considered limited despite 154 responses), the indications are that the E-CAM community relies heavily on a diverse set of community-developed applications. The most commonly occurring, at present, are GROMACS, QuantumESPRESSO, Yambo, CP2K, CPMD, SIESTA, OpenMM, DL_POLY, DL_MESO and ESPRESSO++. Only one commercial applications have occurred more than 10 times: the VASP code.

There is still a heavy reliance in the community on Fortran, meaning that support for this language will be essential on future systems if people are to be expected to migrate their current workloads there.

The typical production use cases observed in the community do not necessarily require extreme scalability. This is not to say, however, that the community does not require extreme-scale resources. Vendors should be wary that ensemble calculations are an important part of the workflow across the E-CAM community and that this has potential cost implications for resources suitable to this case (for example, this may significantly impact the design of cost-effective network topologies for E-CAM workloads).

There are many cases where E-CAM developers are interfacing at a relatively abstract level with community codes. Therefore, the appetite for novel technologies is typically reliant on an implementation (and sufficient documentation) within these codes. This is both an opportunity and a burden: a subset of community applications ported to novel technologies may bring large user communities to such resources *but* such applications are so feature-rich (and therefore monolithic) that this may be exceedingly difficult to implement satisfactorily in practice.

3.2 Programming Paradigms

3.2.1 C++17

C++17 is the most recent revision of the [ISO/IEC standard for the C++ programming language](#), published in December 2017.

The previous C++ versions show very limited parallel processing capabilities when using multi/many core architectures. This situation changes with the C++17, in which the parallelised version of [Standard Template Library](#) is included. The STL is a software library for C++ programming which has 4 components: Algorithms, Containers, Functors and Iterators. *"Parallel STL advances the evolution of C++, adding vectorization and parallelization capabilities without resorting to nonstandard or proprietary extensions, and leading to code modernization and the development of new applications on modern architectures."*[4]

A [multi-threading programming model for C++](#) is supported since C++11.

It has been noted by the creator of C++, Bjarne Stroustrup, that the [continued introduction of expert-level features into C++ may drive away newcomers](#) and he has helped write a set of [guidelines to help people adopt modern C++](#).

E-CAM is very aware of the parallelism potential of C++17 and hosted a dedicated event to promote the use of C++17 within E-CAM in Barcelona in the first quarter of 2017.

3.2.2 Fortran 2018

[Fortran 2018](#) is a significant revision of Fortran 2008 (which was when Fortran became a Partitioned Global Address Space (PGAS) language with the introduction of [coarrays](#)). The revisions mostly target additional parallelisation features and increased interoperability with C and was released on November 28, 2018.

Most Fortran-based software E-CAM sees in practice is implemented in Fortran 95 and there appears to be little awareness of the parallel features of the latest Fortran standards. E-CAM has considered organising a workshop that addresses this lack of awareness (similar to the ["Software Engineering and Parallel Programming in Modern Fortran"](#) held at the Cranfield University), though initial demand for such an initiative has not been strong within the community. PRACE do offer similar courses, such as [Advanced Fortran Programming](#) at E-CAM partner CSC, and we currently direct interested parties to these courses.

It should be noted that this may be due to the fact that [compiler support for the latest Fortran standards](#) is limited. This is most likely due to the fact that Fortran is not widely used outside of the scientific research (limiting its commercial scope).

3.2.3 The (potential) role of Python

Given that it is an interpreted language (i.e., it is only compiled at runtime), Python is not usually discussed much in the HPC space since there is limited scope for control over many factors that influence performance. Where we are observing a lot of growth is where applications are being written in languages like C++ under the hood but are intended to be primarily used via their Python interfaces (as is done in many deep learning frameworks).

We also would like to make developers aware of highly sophisticated Python libraries that are extremely useful for HTC. One of these libraries, [Dask](#), is leveraged by E-CAM within its own HTC library [jobqueue_features](#) which targets MPI workloads.

One should also be aware of the possibilities provided by numba, which is an open source JIT (*just in time*) compiler that translates a subset of Python and NumPy code into fast machine code. numba even supports CUDA GPU programming by directly compiling a restricted subset of Python code into CUDA kernels and device functions following the CUDA execution model.

This is a valuable, and user friendly, development model that allows users to leverage Python for fast prototyping while maintaining the potential for high performance application codes.

A warning to would-be Python users: [Python 2 will stop being maintained in 2020](#) so please make sure that your code is Python3 compliant.

3.2.4 Open Standards

We describe here some of the open standards that are most likely to be leveraged on next generation HPC resources.

MPI

Now more than 25 years old, Message Passing Interface (MPI) is still with us and remains the de facto standard for internode communication (though it is not the only option, alternatives such as [GASNet](#) exist). [MPI-3.1](#) was approved by the MPI Forum on June 4, 2015. It was mainly an errata release for MPI 3.0 which included some important enhancements to MPI:

- Nonblocking collectives
- Sparse and scalable irregular collectives
- Enhancements to one-sided communication (very important for extreme scalability)
- Shared memory extensions (on clusters of SMP nodes)
- Fortran interface

Maintaining awareness of the [scope of past and future updates to the MPI standard](#) is important since it is the latest features that target the latest architectural developments.

OpenMP

OpenMP is also 20 years old and remains the most portable option for on-node workloads. The standard has introduced new features to deal with increasing node-level heterogeneity (device offloading, such as for the GPU, in particular) and varied workloads (task level parallelism).

From GCC 6.1, OpenMP 4.5 is fully supported for C and C++ (with Fortran support coming in the GCC 7 series). The [level of OpenMP support among other compilers](#) varies significantly.

OpenACC

[OpenACC](#) (for open accelerators) is a programming standard for parallel computing developed by Cray, CAPS, Nvidia and PGI. The standard is designed to simplify parallel programming of heterogeneous CPU/GPU systems. Since the paradigm is very similar to the latest OpenMP specs, a future merger into OpenMP is not unlikely.

It should be noted that CUDA (with the [nvcc compiler](#)) is still the most commonly used (and highest performing) library for programming NVIDIA GPUs.

OpenCL

Open Computing Language (OpenCL) is a framework for writing programs that execute across heterogeneous platforms consisting of central processing units (CPUs), graphics processing units (GPUs), digital signal processors (DSPs),

field-programmable gate arrays (FPGAs) and other processors or hardware accelerators. If you want to be portable beyond Nvidia and AMD GPUs the only option is OpenCL. Intel used to support the GPUs with OpenMP target directive, but recently dropped this.

OpenCL 2.2 brings the OpenCL C++ kernel language into the core specification for significantly enhanced parallel programming productivity. OpenCL's bad reputation is at least in part due to its verbose C host API. Its C++ host API on the other hand is quite readable.

When releasing OpenCL version 2.2, the Khronos Group announced that OpenCL would be merging into [Vulkan](#) (which targets high-performance realtime 3D graphics applications) in the future, leaving some uncertainty as to how this may affect the HPC space.

What is interesting to note is the progress of [SYCL](#) (also by the Khronos Group, SYCL 1.2.1 revision 5 is now the latest release as of April 18, 2019, is based on OpenCL 1.2) which is a royalty-free, cross-platform abstraction layer that builds on the underlying concepts, portability and efficiency of OpenCL that enables code for heterogeneous processors to be written in a "single-source" style using completely standard C++. SYCL includes templates and generic lambda functions to enable higher-level application software to be cleanly coded with optimized acceleration of kernel code across the extensive range of shipped OpenCL 1.2 implementations. Developers program at a higher level than OpenCL C or C++, but always have access to lower-level code through seamless integration with OpenCL, C/C++ libraries, and frameworks such as OpenCV or OpenMP.

HIP

Connected to the announcement of the [Frontier](#) exascale system, AMD has decided to create a new solution for programming their GPU: Heterogeneous-compute Interface for Portability, or [HIP](#), is a new C++ runtime API which allows developers to create portable applications that can run on AMD and other GPU's.

Robustness and performance portability testing are still ongoing, but it offers a very similar interface to the CUDA language allowing to easily the conversion of a CUDA code into HIP.

3.2.5 Runtime System Approaches

As noted already, programming paradigm standards are moving forward to adapt to the technologies that we see in the market place. The complexity of the hardware infrastructure (as outline in Section 2) necessarily brings complexity to the implementation of the programming standards.

There are number of programming models that leverage runtime systems under development. They promise to abstract away hardware during the development process, with the proviso that tuning at runtime may be required. Our experience to date with these systems is limited so we simply provide a list of four such systems here (which is certainly not exhaustive) in no particular order:

- [HPX](#), a C++ Standard Library for concurrency and parallelism. The goal of the HPX project is to create a high quality, freely available, open source implementation of [ParalleX](#) concepts for conventional and future systems by building a modular and standards conforming runtime system for SMP and distributed application environments. (Most recent release: v1.3.0, May 2019)
- [Kokkos](#) implements a programming model in C++ for writing performance portable applications targeting all major HPC platforms. For that purpose it provides abstractions for both parallel execution of code and data management. Kokkos is designed to target complex node architectures with N-level memory hierarchies and multiple types of execution resources. It currently can use OpenMP, Pthreads and CUDA as backend programming models. (Most recent release: v2.8.00, February 2019)
- [OmpSs](#) is an effort to integrate features from the StarSs programming model developed at Barcelona Supercomputing Centre (BSC) into a single programming model. In particular, the objective is to extend OpenMP with new directives to support asynchronous parallelism and heterogeneity (devices like GPUs). However, it can also be understood as new directives extending other accelerator based APIs like CUDA or OpenCL. The OmpSs environment is built on top of BSCs Mercurium compiler and Nanos++ runtime system. OmpSs-2 is the second generation of the OmpSs programming model and is currently under development. (Most recent release: v18.04, April 2018)
- [Charm++](#) is an adaptive C/C++ runtime system providing speed, scalability and dynamic load balancing. Programs written using this system will run unchanged on MIMD machines with or without a shared memory. It provides high-level mechanisms and strategies to facilitate the task of developing even highly complex parallel applications. In particular we highlight the recent release of [charm4py](#) which builds on top of Charm++ but

provides an Python API. (Most recent release: v6.9.0, November 2018 for Charm++; v0.12.3, February 2019 for charm4py)

3.2.6 Feedback for software developers

Awareness of the latest standards and the status of their implementations are critical at all times during application development. The adoption of new features from standards are likely to have large impact on the scalability of application codes precisely because it is very likely that these features exist to target the scalability challenges on modern systems. Nevertheless, you should be aware that there can be very long gaps between the publication of a standard and the implementation in compilers (which is frequently also biased by who is pushing which standard and why: Intel pushed OpenMP because of their Xeon Phi line, NVIDIA who own PGI pushes OpenACC because of their GPUs, AMD pushed OpenCL for their own GPUs to compete with CUDA). The likelihood of there being a single common (set of) standards that performs well on all architectures is not high in the immediate future. For typical developers that we see in E-CAM, MPI+OpenMP remains the safest bet and is likely to perform well, as long as the latest standards are used (and you can find a suitable compiler that implements them).

More disruptive software technologies (such as GASNet) are more likely to gain traction if they are used by popular abstraction layers (which could be PGAS languages, runtime systems or even domain specific languages) "under the hood". This would make the transition to new paradigms an implementation issue for the abstraction layer. Indeed, given the expected complexity of next generation machines, new programming paradigms that help remove the performance workload from the shoulders of scientific software developers will gain increasing importance.

As you may have noticed in the previous discussion, the computer scientists developing these abstractions are working mostly in C++ (SYCL, Kokkos, Charm++,...), and the implementation of new standards in compilers is also seen first for C++ (for Clang even proposed additions to the standard are usually implemented). From a practical perspective this has some clear implications: if you want to access the latest software technologies then you had better consider C++ for your application. This may appear harsh given that the Fortran standard has obvious capabilities in this space, but it is a current reality that cannot be ignored. Also, given the likelihood that the majority of researchers will eventually transition to industry it is perhaps prudent to ensure they have programming expertise in a language that is heavily used in the commercial space. Finally, the eco-system surrounding C++ (IDEs, testing frameworks, libraries,...) is much richer because of it's use in industry and computer science.

New programming frameworks are exciting and have new features but their implementation cannot be taken lightly: a lot of development work (and fault tolerance) is required. In E-CAM we have already held a [Kokkos workshop](#) and are likely to hold another in the near future. It is a model of particular interest in large part because it has had significant adoption and a 10-year funding horizon.

Taking all of the above into consideration, if you are a serious developer for exascale resources you should probably focus on C++. If you are, however, starting out with an application we would distil the discussion into the following advice: productivity is the most important part of your development process, prototype your application using Python leveraging the Python APIs to the libraries you need; write tests as you go; and, when you start doing computationally intensive work, use C++ with Python interfaces to allow you to squeeze out maximal performance using the latest software technologies.

4 Interactions between end-users, developers and vendors

4.1 Outcomes and key recommendations from the *E-CAM Extreme-Scale State-of-the-Art Workshop*

This section has been produced primarily based on some key input from the [E-CAM Extreme-Scale State-of-the-Art Workshop](#) that took place on 6-7 July 2017 in Barcelona (of which more expansive detail is provided in Appendix A). The event represented a gathering of key E-CAM personnel (code developers, application users) as well as representatives from other European projects (e.g. PRACE, ETP4HPC, Center of Excellence (CoE)s including POP, NoMAD, EoCoE and MAX) and the E-CAM user community. There were discussion sessions on both days which includes representatives of *hardware vendors* (a term which we loosely interpret to include EU-funded hardware development projects which clearly include industrial partners). *Software development* was represented by the presence of 5 CoEs, PRACE and developers of high profile applications in the E-CAM space.

One of the main objectives of the workshop was to inform, as well as instigating discussions with, E-CAM developers and end-users about some of the key HPC issues and challenges in the field of molecular and atomistic simulations, with particular emphasis on forward-looking exascale topics. Some of the main issues and topics included the following, and are discussed in more details in the sections as indicated in parentheses:

- The European exascale roadmap (Section 4.2)
- Emerging hardware architectures relevant to exascale computing (Section A.1).
- Exascale challenges in exploiting massive parallelism (Section A.2).

The discussion sessions of the meetings were intense and probing. Repeatedly raised was the potential conflict of interest between the E-CAM pilot projects (where industrial partners are interested in software developments that facilitate new science, including the development of new algorithms) and the funding agency desire to focus software developments exclusively on HPC goals. It was recognised that E-CAM needs to develop niche activities that can provide mutual benefit overlapping area between these two objectives.

To this end, E-CAM has highlighted the possibility to provide a reliable software delivery mechanism between academic software developers and industrial partners. In addition, it has sought to influence the workflows of the scientific developer community so that it aligns more with the expectations of software in the industrial space (in terms of documentation, usability and testing).

Increasing the E-CAM community exposure to HPC technologies is also a key goal that is to be enhanced by a set of HPC pilot projects (see Section 4.3) and the introduction of transversal components to our ESDW events (exposing people to new technologies and best practices).

Finally, to ensure that E-CAM can achieve it's own internal goals, a number of additional steps were considered:

- Deeper collaboration with projects such as EoCoE, POP, PRACE to collaborate on scaling and optimisation work for codes with potential for exascale systems,
- Leverage transversal ESDW workshops to create more synergy between the Work Package (WP)s and bring the E-CAM developers to the same level in terms of parallel code development skills,
- Increase the visibility and impact of the modules developed by E-CAM community by publishing pilot project webpages and advertising them via Twitter and other means.

4.2 The European exascale roadmap

The European HPC Technology Platform, ETP4HPC, is an industry-led think-tank comprising of European HPC technology stakeholders: technology vendors, research centres and end-users. The main objective of ETP4HPC is to define research priorities and action plans in the area of HPC technology provision (i.e. the provision of supercomputing systems). It has been responsible for the production and maintenance of the [European HPC Technology Strategic Research Agenda \(SRA\)](#), a document that serves as a mechanism to provide contextual guidance to European researchers and businesses as well as to guide EU priorities for research in the Horizon 2020 HPC programme, i.e. it represents a roadmap for the achievement of European exascale capabilities. This roadmap is now being defined within the context of the EuroHPC objectives (see Section 2.3.1 for more details).

We have had numerous discussions of the E-CAM community software needs through our exchanges with ETP4HPC during the course of our contributions to the SRA. The particular contribution from our discussion related to the software needs for exascale computing within the ETP4HPC SRA report is shown in the paragraphs below:

E-CAM has not committed itself to a single set of applications or use cases that can be represented in such a manner, it is instead driven by the needs of the industrial pilot projects within the project (as well as the wider community). Taking into consideration the CECAM community and the industrial collaborations targeted by E-CAM, probably the largest exa-scale challenge is ensuring that the skillsets of the application developers from academia and industry are sufficiently up to date and are aligned with programming best practices. This means that they are at least competent in the latest relevant language specification (Fortran 2015, C++17,...) and aware of additional tools and libraries that are necessary (or useful) for application development at the exa-scale. For application users, this means that they have sufficient knowledge of architecture, software installation and typical supercomputing environment to build, test and run application software optimised for the target.

While quite specific "key applications" are under continuous support by other CoEs, this is not the current model of E-CAM. E-CAM is more likely to support and develop a software installation framework (such as [EasyBuild](#)) that simplifies building the (increasingly non-trivial) software stack of a particular application in a reliable, reproducible and portable way. Industry has already shown significant interest in this and E-CAM is particularly interested in extending the capabilities of EasyBuild to Extreme-scale Demonstrators (EsD) architectures, performance analysis workflows and to new scientific software packages. Such an effort could easily be viewed as transversal since such developments could be leveraged by any other CoE.

One important focus of the SRA is the development of the [Precursors to Exascale Supercomputers](#) that are vehicles to optimise and synergise the effectiveness of the entire HPC H2020 programme (see Figure 9 for a list of European HPC technology projects involved, including E-CAM), through the integration of R&D outcomes into fully integrated HPC system prototypes.



Figure 9: The European HPC Technology Projects within the European HPC Eco-system.

The work in developing these will fill critical gaps in the H2020 programme, including the following activities:

- Bring technologies from FET-HPC projects closer to commercialisation.
- Combined results from targeted R&D efforts into a complete system (European HPC technology ecosystem).
- Provide the missing link between the three HPC pillars: technology providers, user communities (e.g. E-CAM) and infrastructure

As one of the CoEs, E-CAM should aim to provide insight and input into the requirements of future exascale systems based on lessons learnt from activities within E-CAM (e.g. software development and relevant performance optimisation and scaling work). This would entail further knowledge and understanding within E-CAM on exploiting current

multi-petaflop infrastructures, what future exascale architectures may look like, as well as interaction and close collaboration between E-CAM and other projects (i.e. the projects shown in Figure 9); these are also covered in subsequent sections of this paper.

4.2.1 FocusCoE

As part of the second round of CoE funding there was a coordination and support action for CoEs. FocusCoE was funded to contribute to the success of the EU HPC Ecosystem and the EuroHPC Initiative by supporting the EU HPC CoEs to more effectively fulfil their role within the ecosystem and initiative: ensuring that extreme scale applications result in tangible benefits for addressing scientific, industrial or societal challenges.

Part of this coordination effort is assisting the CoEs to interact with the EuroHPC hardware-related projects which the vendors themselves are engaged with. As such, we see FocusCoE as a concerted communication channel with ETP4HPC and EuroHPC for E-CAM and are extremely supportive of initiatives such as the HPC CoE Council where these topics are discussed.

4.2.2 Other discussions with hardware and software vendors

E-CAM people participated the 2017's Teratec forum and discussed with software and hardware vendors. NVidia presented the top ten HPC applications accelerated by GPU, among them, Gaussian, Gromacs, NAMD, VASP, AMBER are CECAM's community codes. This shows the extent of the efforts carried out by the community.

Bull presented to us the prototype of Exascale-focused ARM-based Sequana X1310 supercomputer. And the Mixed Intel Xeon-Xeon Phi based Sequana X1000 machine will be available at Spring 2018 in French TGCC center with up to 20 Petaflops. We've also discussed with researchers from the CEA-UVSQ-Intel joint Exascale Computing Research Lab. We're very interested in their exascale efforts for one of the CECAM's community code, Abinit. They presented their work via poster at the forum. They used the MAQAO and CERE tools to analyse the Abinit code performance and use the MPC framework to facilitate the paralleling programming. In collaboration with the Abinit developers, they run directly this code on Intel specific architecture by developing an *hardware abstraction layer*. This may provide a good example, or possible orientation, for the other important community codes which have a real need to go to exascale.

E-CAM also had a booth at the PASC18 conference and presented a paper there on "Task-Based Parallelization of Replica Exchange Transition Interface Sampling in OpenPathSampling". Having a booth allowed us the opportunity to engage in discussion with software vendors (in particular) to understand where potential collaborations may lie.

4.3 WP7 Pilot Projects

To engage at a practical level with the challenges we have exposed (both in this Section and Section 3), E-CAM has two ongoing pilot projects that filter these challenges in two particular directions:

- An HTC project, [jobqueue_features](#), that recognises the role of ensemble calculations in the E-CAM community and provides an adaptive framework that efficiently maps it to extreme-scale resources. This project was initially carried out in collaboration with Partnership for Advanced Computing in Europe (PRACE) and implemented as a Python library.
- A Load-balancing Library (ALL) which aims to provide an easy way to include dynamic domain-based load balancing into particle based simulation codes. The library is developed in the Simulation Laboratory Molecular Systems of the Juelich Supercomputing Centre at Forschungszentrum Juelich.

We are also hoping to investigate the porting of an E-CAM application to the KOKKOS framework. In the past we have also looked at deploying HPX within an E-CAM application (detailed in Section 4.3.3 below).

4.3.1 HTC in E-CAM

Within the E-CAM CoE target community there are a large number of use cases where the same molecular dynamics application can be run many thousands of times with varying inputs. The goal of the mini-project will be to allow scientific community to leverage large-scale resources to efficiently manage this form of high-throughput computing.

A collaborative project with PRACE was created to address this by preparing a library for optimising molecular dynamics simulations in terms of task scheduling for an initial particular use case of [OpenPathSampling](#) using the [Dask](#) framework. The project was approved after review within PRACE and an initial version was released in Q1 2019.

A number of additional use cases for HTC within E-CAM across all WPs have been identified. It has also been shown to be of interest to our industrial contacts during the [DPD Scoping Workshop](#), where it was reported that "The main role exascale could play is in rapid screening of candidate systems for formulated product companies. This requires accurate models, efficient computation and appropriate workflows to be available". Full report available [here](#).

In 2018 we have organised a [transversal ESDW](#) to help address HTC use cases. The [second part of the HTC workshop](#) will take place in July 2019 and it will focus exclusively on the E-CAM library.

4.3.2 A Load-balancing Library

At Jülich Supercomputing Centre (JSC), a library for dynamically redistributing work in particle- or mesh-based simulation codes is being developed. Currently it is developed under the name "A Loadbalancing Library" (ALL) which contains a number of methods (e.g., tensor product decomposition, staggered mesh, topological mesh or Voronoi based methods) which iteratively modify the computational domain geometries to re-balance the computational load on each processor. Somewhat more expensive methods (based on d-dimensional work distribution functions) distribute the work within one library call and are suited for, e.g., static load balancing or initial partitioning of the simulation domain. The library is based on C++ template programming model to deal with different data types that describe domain boundaries and domain based work. In order to encapsulate the data, ALL uses a class in which the required data and the computed results of a load-balancing routine are saved and can be accessed. It is an ongoing project that will be reported in more detail in the next WP7 deliverable.

An ESDW focussing on ALL was part of the 2018/2019 ESDW program, where developers from 8 community codes came together to discuss collaborative opportunities, and included efforts to initiate integration of ALL into their codes. A second part of the ESDW was held in June 2019, with hands-on foreseen for the integration and testing of the library in part of the codes.

4.3.3 Leveraging HPX within E-CAM

[HPX](#) is a C++ runtime system for parallelism and concurrency. It aims to implement the C++ standard for parallelisms and concurrency as well as expanding and improving the functionality of the standard. Whereas the C++ standard only handles parallelism within a node, HPX has functionality for multi-node parallelism as well.

HPX handles parallel constructs using light weight *tasks*, instead of heavier OS threads. HPX runs one thread per core, each of these have their own task scheduler which is responsible for running the tasks, once a task has finished another task is run without switching the OS thread, this allows HPX to efficiently support a large number of tasks. One example where these tasks are used is to implement an extended version of `std::future` from the standard C++ library. The HPX version has more functionality than the one from the C++ standard with among other things the ability to invoke a second operation once then future has completed through the use of `hpx::future::then`. The HPX version also comes with the ability to more easily compose futures, waiting for or adding an action to perform when some, any or a given number of them have completed.

Distributed computing in HPX is handled by giving the programmer the ability to call functions and create objects on any node participating in running the program. In HPX functions that can be applied at remote locations are referred to as *actions*, these can be regular functions or member functions. These actions need to be defined using a set of macros before they are callable remotely. Lets say we have a function `some_global_function`, to be able to call it remotely we need to create the macro `HPX_PLAIN_ACTION(app::some_global_function, some_global_action)` which now gives us `some_global_action` which can be called on a remote location. Classes which can be created remotely are referred to as *components*, like the functions these need to be defined using a special macro to enable it to be created on remote locations, any member functions that can be called remotely also needs to be declared with a macro similar to the regular remote functions.

The default configuration is for HPX to run one *locale* per compute node. Effectively one process per node and then within this process shared memory parallelism is used, similar to running MPI communication between nodes and OpenMP within the node. Data transfers between the hosts are handled by the HPX *parcel transport layer* [5] which will move data around to the places where it is needed. Any data structures moved need to have methods to serialize and deserialize defined for them so that the data can be serialized before it is moved and then remade back into an object at the receiver.

HPX also supports distributed containers, i.e. a C++ vector where the elements are distributed over multiple hosts. Most of the parallel algorithms from the C++ STL are also implemented in HPX, additionally HPX adds the ability to use these on the distributed containers it implements.

ESPReso++ and HPX

The ESPReso++ code is built as a library to be called from python. The code itself is parallelized using MPI and is treating every core as an individual MPI rank. Both of these cause design characteristics cause some difficulties if one wants to port the code to use HPX.

Firstly, HPX needs its own runtime active for any HPX functionality to work. The regular way presented in the HPX documentation involves a specialized HPX main function that is called from the regular main function and the runtime is only active in the HPX main function. For libraries where the main function is not controllable by the library this becomes tricky to work with.

Secondly, since the code is originally designed to only utilize MPI, turning it into a hybrid parallel code is not straight forward, especially if one wants to exploit task based parallelism. For a simple version one could simply identify hot loops in the code and apply shared memory parallelism to them and still do MPI like communication between the hosts. But in that case simply applying OpenMP directives to the loops would likely be a better first step as it would involve far less code modification.

To get any real benefits from implementing the program with HPX would likely require a larger rewrite of the code-base with HPX and shared memory task based parallelism in mind. Without direct and deeper involvement from the ESPReso++ development team this is not feasible.

HPX as a whole

HPX shows promise as a distributed computing framework. The ability to remotely create objects and call functions enables different programming paradigms from regular MPI type parallelism.

Implementing the C++ standard for parallelism and concurrency and providing extensions to it also provides a great starting point. In the future, one could in theory take a C++ code parallelized with what the standard provides and quickly convert it to a distributed program by utilizing HPX.

However, HPX also has some issues. The reliance on macros to register components and actions makes implementing them complex and requires significant bookkeeping. The programmer needs to remember to which macros each function/object names need to be passed and with what names to call them afterwards. Any errors made when calling these macros end up with long, unintelligible compiler errors.

The documentation for HPX is also at times sparse and possibly out of date, the project is still under development and things presented a few years ago are not necessarily accurate anymore. The best place to look for how certain functions and features are to be used is often the unit tests for that particular feature.

4.4 Feedback for software developers

E-CAM is attempting to act as a point of contact for the community to the wider EU HPC ecosystem, distilling information and highlighting projects and programs that may be of specific interest or potential impact to the community. E-CAM also continues to engage in particular with software vendors, looking at what model for software adoption or commercialisation would be mutually beneficial for industrial and academic partners (given the constraints of both).

E-CAM has identified hardware abstraction layers as a potential key technology for the wider application space. The specific E-CAM software developments focus on aspects that are cross-sectional to the E-CAM community, targeting critical improvements to the efficiency of typical user workloads while remaining hardware independent. The E-CAM HTC effort targets the ensemble workloads common to our users while providing capabilities that are not available with other solutions (such as interactive supercomputing and direct access to the memory space of executed tasks). The load-balancing library is implemented abstractly and provides a mechanism to allow the user to experiment with multiple load-balancing algorithms provided by the library.

A E-CAM Extreme-Scale State-of-the-Art Workshop, 6-7 July 2017 Barcelona

This appendix is a summary of the content and significance of the [E-CAM Extreme-Scale State-of-the-Art Workshop](#) which was held from the 6th to the 7th of July 2017 in Barcelona. Due to the rapidly progress in the HPC hardware and funding environment over the project lifetime, some of the impact of the outcomes and discussions wane over time. Nevertheless, the significance of discussion at the time remains and we chose to include it here.

This appendix also provides a detailed account and record of the event itself.

A.1 Emerging hardware architectures relevant to exascale computing (in 2017)

The European Commission supports a number of projects in developing and testing innovative architectures for next generation supercomputers, aimed at tackling some of the biggest challenges in achieving exascale computing. They often involve co-design involving HPC technologists, hardware vendors and code developer/end-user communities in order to develop prototype systems. Some of these projects include:

- The DEEP (Dynamic Exascale Entry Platform) projects (DEEP, DEEP-ER and DEEP-EST)
- The Mont-Blanc projects (Mont-Blanc 1, 2 and 3)
- The PRACE PCP (Pre-Commercial Procurement) initiative

We discuss further the first two of these since they were of explicitly discussed during the workshop. E-CAM is also now represented in the PRACE PCP (Pre-Commercial Procurement) initiative.

A.1.1 The DEEP projects – overview of the architecture

The DEEP projects have been developing a modular approach to extreme-scale computing via an innovative "cluster booster architecture". In the initial DEEP and DEEP-ER projects, they have successfully integrated a standard, InfiniBand cluster using Intel Xeon nodes (Cluster Nodes) that is connected to a novel, highly scalable Booster consisting of Intel Xeon Phi co-processors (Booster Nodes) connected via an underlying EXTOLL high-performance 3D torus network (see Figure 10).

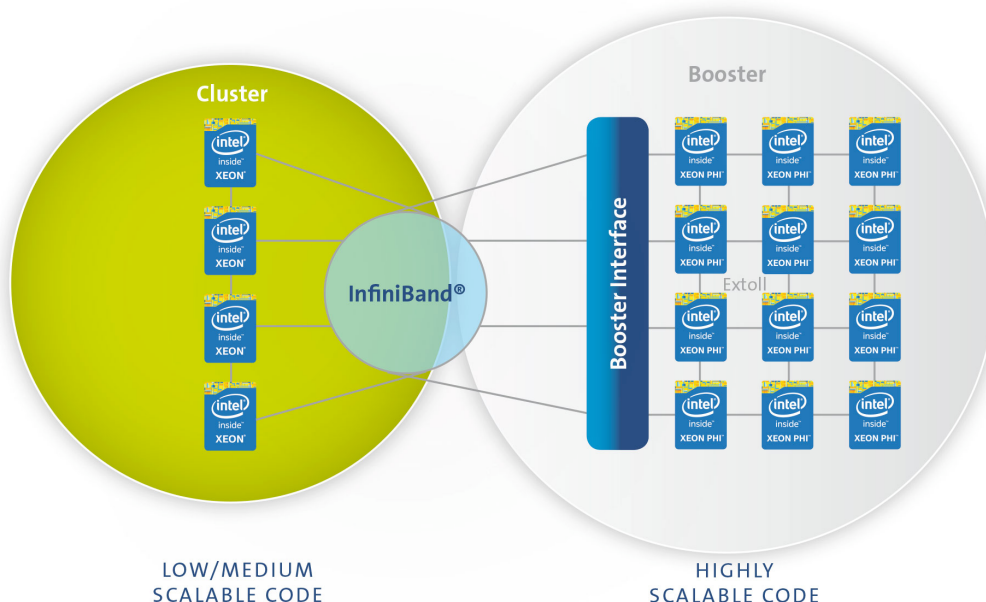


Figure 10: The DEEP hardware architecture.

This architecture enables high throughput and scalability on the Booster component, aimed at highly scalable code execution that supports parallelism via proven and standards-based programming models such as MPI and OpenMP. Parts of the code with more limited scalability (e.g. owing to complex control flow or data dependencies) are executed on the Cluster component, with transparent bridging of both interconnects to ensure high-speed data transfer. Innovative aspects:

- on-node memory, network attached memory.
- Novel fabric, uses ASIC-based network controller designed and produced by EXTOLL.
- Self booting Xeon Phi nodes.

Special optimisations:

- Resilience
- I/O: SIONlib, Exascale10

The project makes heavy use of co-design with applications selected from the beginning of the project. In the next phase, the DEEP-EST project will generalise the cluster-boosters approach by extending the modular concepts of the current system. Apart from cluster and booster (Intel Xeon Phi) components, additional components will be developed with architectures adapted for data-intensive and data analysis applications.

A.1.2 The Mont-Blanc projects

The Mont-Blanc projects focus on developing prototype HPC systems based on energy-efficient embedded technologies. It has developed several ARM-based computational platforms, leveraging some of the technologies that have emerged from the highly-competitive low-power mobile computing market, along with the requisite software stack to facilitate development and execution of complex parallel codes.

During the initial two phases of the project, which begun in 2011, it has examined a range of embedded and mobile processor architectures. The activities have included the development of small-scale, mini-clusters built using a variety of node architectures, e.g. an Nvidia Tegra K1 SoC with ARM Cortex processors and Kepler GPU, or a Samsung Exynos 5 SoC combined with Cortex processors and the ARM Mali T-604 GPU. The first official prototype for the project has since been built and operational since 2015. This system consists of 1,080 compute cards where each card or node consists of a Samsung Exynos 5 Dual SoC, powered by ARM Cortex-A15 processors (2x cores) and an ARM Mali-T604 GPU along with 4GB of LPDDR3-1600 memory, 64 GB of local storage on microSD and 10 GbE networking bridged via USB 3.0.

The project is currently in its third phase, coordinated by Bull, the Atos brand for technology products and software. It adopts a co-design approach to ensure that the hardware and system innovations can be translated into HPC application performance and energy efficiency. Here, a new demonstrator system, named Dibona, is being built based on the 64-bit ThunderX2 processors from Cavium® that implements the ARM v8 instruction set. The full system will eventually be composed of 48 compute nodes with 96 ThunderX2 CPUs or 3,000 cores in total.

Apart from hardware developments, the project has also invested significant efforts in developing a software ecosystem for ARM-based architectures in HPC. These include the porting and extension of performance tools to work on ARM-based platforms (e.g. Score-P, Scalasca, and BSC's performance analysis toolset including Extrae, Paraver and Dimemas). The Mont-Blanc project has also contributed to the OmpSs parallel programming model to support ARMv8 64-bit processors, further enabling it to exploit multiple cluster ARM-based nodes along with transparent application check-pointing for fault tolerance. Furthermore the project also developed a novel power measurement infrastructure in order to determine power efficiency that is key to exascale. This takes high-frequency measurements of power consumption at the granularity of a single compute node, and up to the entire prototype system.

A.2 Exascale challenges in exploiting massive parallelism

This section is a summary of various talks presented at the workshop that are related to the discussion of exascale challenges in exploiting massive parallelism. The presentations include those from application developers, code developers and users within E-CAM and beyond, and representatives from other CoEs.

A.2.1 "Large scale electronic structure calculations with CP2K" - Jurg Hutter

CP2K is a popular, freely available software package written in Fortran and used for atomistic and molecular simulations of solid state, liquid, molecular, periodic, material, crystal, and biological systems. It provides a framework for different modelling methods such as DFT and wave-function methods (two methods that are highlighted in the talk) as well as many others. The talk focused on some of the large-scale (towards exascale) challenges and contributions from the CP2K development team. The talk introduced the audience to the use of sparse matrix libraries for KS-DFT simulations for large scale computations. By using a blocked compressed sparse row format, followed by load balancing using randomized indices, Cannon's algorithm can then be applied, with computations optionally offloaded

to accelerators, to achieve better scaling (up to $\frac{1}{\sqrt{N}}$, which could be a bottleneck for up to 1 million processes). Some of the results shown included the enhanced performance of a mini-app (using the LIBCUSMM library) on the NVidia Pascal architecture relative to its previous Kepler architecture, with up 20-50% increase in flops. In another example dominated by matrix multiplications, the performance figures (Fig.11) showed comparable performance between a GPU node (on the Daint system) compared to a (*less expensive*) KNL node. More recent developments try to address the bottleneck of Cannon's method, including the use of remote memory access to replace point-to-point communication, and using a 2.5-dimensional variant of Canon's algorithm at the expense of higher memory usage. These have resulted in performance gains of 1.2-1.4x on large scale systems of up to 50,000 cores and 4,000 GPUs. Application of these methods have enabled researchers to carry out large-scale energy calculations on large systems, e.g. 1 million atoms of a STM virus, albeit only for a few femtoseconds.

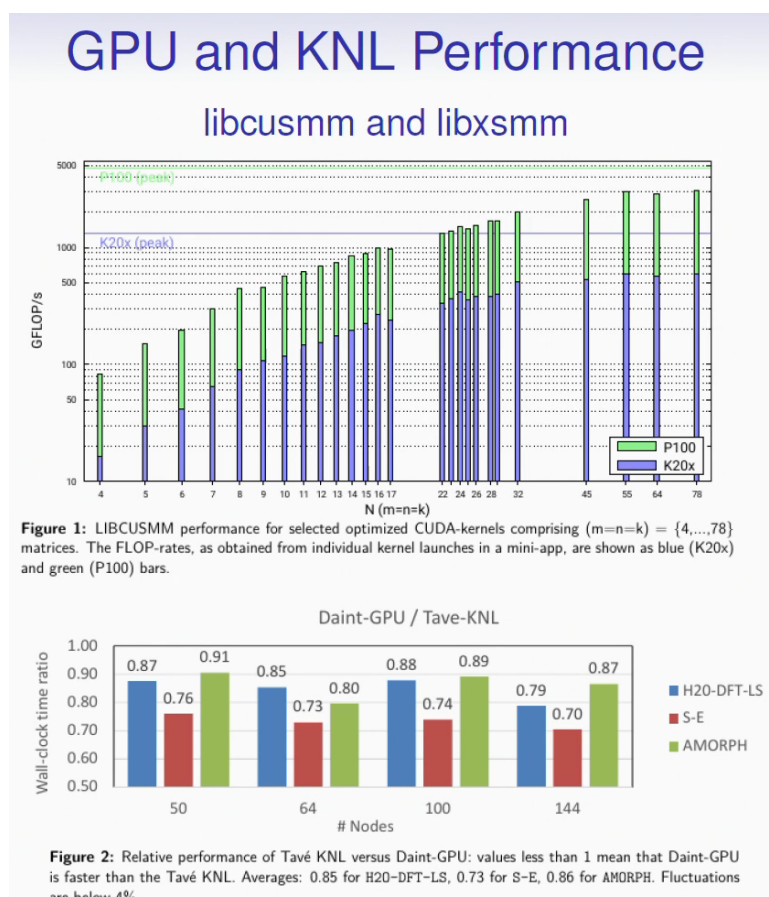


Figure 11: CP2K Presentation: GPU and KNL Performance

For wavefunction methods, the talk introduced a number of Resolution of Identity (RI) approaches based on Gaussian and plane waves (GPW), including RI-dRPA, RI-MP2, RI-G0W0. The switch to new algorithms using sparse tensor representations and overlap metric have allowed scaling to thousands of nodes for large systems.

In future, this [DBC SR library](#) can be generalised for sparse tensor algebra, meaning that tensor contractions can be mapped to matrix multiplications. This tensor library is still in development at the time of this report.

A.2.2 "Scalability of Path Sampling Simulations" – David Swenson

Path sampling methods, such as transition path sampling and transition interface sampling, are Monte Carlo simulations in the space of trajectories. They provide powerful tools for studying topics such as chemical reactions, crystallization, binding processes, and conformational changes in biomolecules. Path sampling software can leverage the high-performance capabilities of existing tools for molecular dynamics simulation and analysis, as well as producing additional scalability by running multiple trajectories in parallel. As a part of E-CAM, the OpenPathSampling (OPS) software package has been extended to support widely-used and highly-scalable molecular dynamics engines (e.g. OpenMM, LAMPPS).

The talk gave an overview of using OPS to monitor the trajectories space in order to handle rare events. This is carried out using a Python library that interface with the simulation engine directly (for those with Python APIs such as

OpenMM, LAMMPS) or indirectly (e.g. file-based interaction for Gromacs). In terms of performance, the overhead from OPS was shown to be less than the variance due to Gromacs's performance tuning. In realistic simulations, the cost of the underlying dynamics dominates OPS's performance, i.e. its scalability (towards exascale) is comparable to that of the underlying engine itself such as Gromacs. Finally, additional functionalities are being developed for the library, including support for running simultaneous trajectories (see Section 4.3).

A.2.3 "PaPIM: A Code for (Quantum) Time Correlation Functions" – Momir Malis

The Phase Integration Method (PIM) is a novel approximate quantum dynamical technique developed for computing systems time dependent observables. PIM employs an algorithm in which the exact sampling of the quantum thermal Wigner density is combined with a linearized approximation of the quantum time propagators represented in the path integral formalism that reduces the evolution to classical dynamics.

The quantities of interest can then be computed by combining classical molecular dynamics algorithms with an original generalised Monte Carlo scheme for sampling the initial conditions and averaging them over all sampled points in phase space. Because all trajectories are mutually independent, the algorithm can be efficiently parallelised. The work within E-CAM have resulted in novel Fortran90 PaPIM code parallelised using MPI, or PaPIM. While PaPIM has shown good scalability up to several thousand cores, with other parts of the code also having further potential for parallelisation. These include computing the polymer chains in parallel, parallel approaches for individual potential energy calculations (already being examined by other groups) and the decoupling of classical trajectory propagation. Finally, since PIM requires a multitude of input parameters, a large-scale parallel search for optimal sets of PIM sampling parameters will be useful and are planned as future work for the project.

A.2.4 "Porting DL_MESO_DPD on GPUs" – Jony Castagna

DL_MESO is a general purpose mesoscale simulation package developed by Michael Seaton written in Fortran90 and C++ which supports both Lattice Boltzmann Equation (LBE) and Dissipative Particle Dynamics (DPD) methods. The talk gave an overview of some of the challenges in porting the relevant Fortran90 code to Nvidia GPUs.

One of the main problems first encountered was the random memory access pattern, caused by particle locations being stored in a contiguous manner, which can be fixed by re-organising the cell-linked array to ensure coalescent memory access. The GPU port, when executed on a Tesla P100 GPU, showed weak scaling of up to 4x speed-up over an Intel Ivy Bridge 12-core processor (See Fig.12); this is some way off the theoretical ideal speed-up of 12x due to clustering of particles and hence load imbalance amongst threads (which is to be addressed in future work).

One key recommendation from this talk, which may be applicable for GPU porting work in general, is to maintain two versions of the code, one codebase for the GPU while the other in plain Fortran/C, and that new physics should only be introduced into the latter before porting work to the GPU.

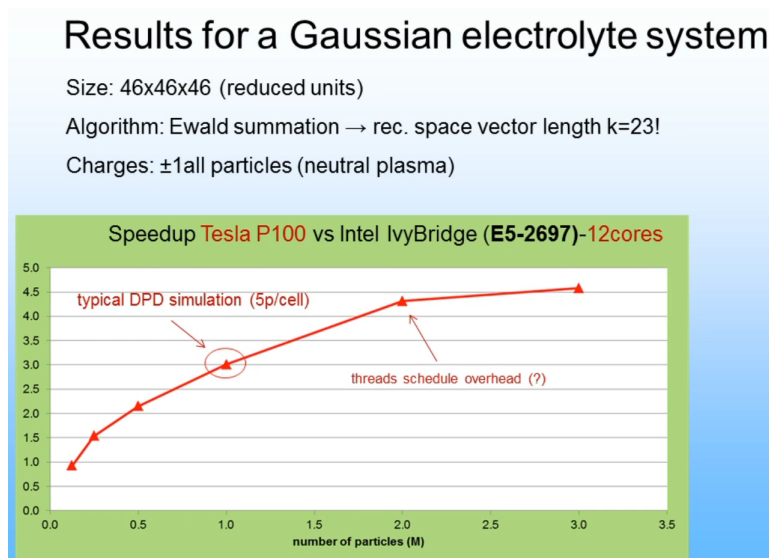


Figure 12: DL_MESO: GPU porting results

A.2.5 "MP2C: Multiple-particle collision dynamics on massively parallel computers" – Godehard Sutmann

The talk focuses the scalable implementation of MPC or MP2C for massively parallel computers. MP2C is a grid-free method for mesoscale simulation of hydrodynamic media mainly based on the concept of particles, bridging the gap between microscopic simulations on the atomistic level and macroscopic calculations on the continuum level by solving the Navier-Stokes equations in different types of discretisation. With a small set of parameters (particle density, scattering angle, mean free path of a particle), it is possible to reproduce hydrodynamic behaviour and map collective interactions to a local particle based algorithm.

The talk covered the hybrid domain partitioning methods used by MP2C to distribute work to the processors, including typical communication patterns and load balancing issues. This enables a coupling between molecular dynamics (MD) simulations and a mesoscopic solvent, taking into account hydrodynamic interactions between solutes. Both MPC and MD computations have demonstrated strong scaling on the JUGENE system. It then went on to become one of the first codes to demonstrate scalability across the whole JUQUEEN system (458k processor cores compared to 262k cores on the JUGENE, see Fig. 13) MP2C has also been adopted as a benchmark for parallel I/O using the SionLib I/O library, which have been able to achieve I/O reads of >100 GB/s and writes of 60 GB/s.

The final part of the talk discussed in more details regarding load balancing issues, caused by highly heterogeneous particle distribution, meaning inefficient use of the HPC resources (i.e. some cores will be busy while others left idle). The solutions include further distribution of workloads at the expense of more data traffic and communication, and adjustment of the volume of domains at the expense of more complex geometries and communication patterns. These approaches to address load imbalance play a pivotal role in the code's scalability.

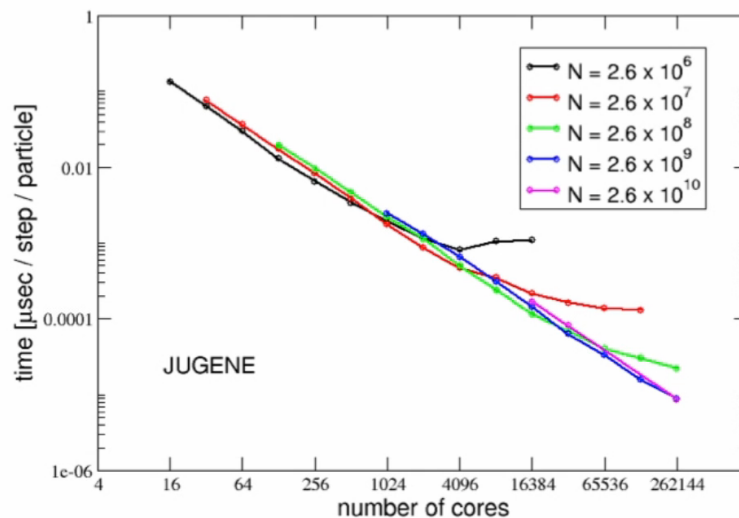


Figure 13: MP2C scaling on JUGENE

A.2.6 "POP – understanding applications and how to prepare for exascale" – Jesus Labarta

The POP CoE projects aims to apply common analysis methodologies to a large base of customer codes to increase the awareness of fundamental issues that limit the scalability and performance of HPC applications. The project offers assessment of application performance and helps customers of the POP service to refactor applications in directions that maximize the performance and scaling revenue at minimum cost.

Due to increasingly complexity and variability of novel HPC architectures, there seems to be a growing divergence between the ways systems behave, and the way developers expect them to behave. Hence the promoted vision of POP is to decouple the underlying hardware system from the application (where the science happens) via different software layers (e.g. programming model layer and runtime layer, Fig.14). An example of activities already being undertaken at the programming model layer includes the StarSs paradigm (encompassing OmpSs that have developed features being incorporated into OpenMP). This is also discussed in Section 3.2.5.

The POP CoE offers three levels of services: application performance audit, application performance plan and proof-of-concept software demonstrators. Its target customers include code developers (looking to assess performance and behaviour), application users (looking for potential improvements for specific conditions/set-ups), infrastructure operators (looking for information for allocation purposes or training of support staff) and vendors (looking to carry out benchmarking or system design guidance). Based on a hierarchy of fundamental performance factors (Fig. 15), the

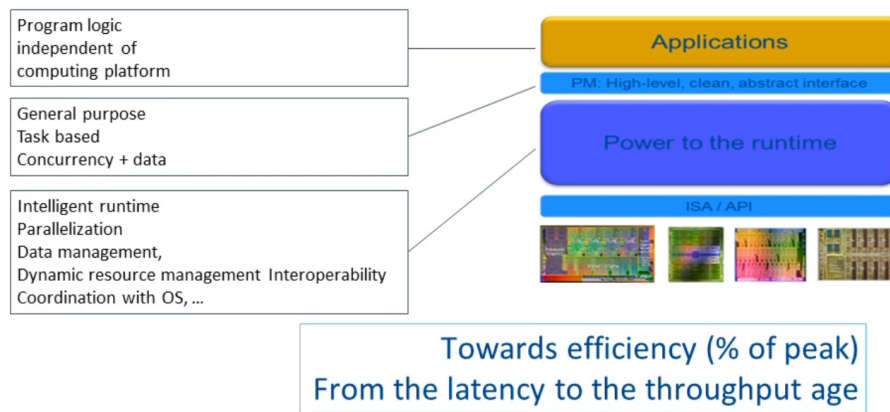


Figure 14: POP: Different software layers

presentation provided a number of case studies where POP has improved the efficiency and scalability of applications it has evaluated. In total, it has analysed well over 50 codes.

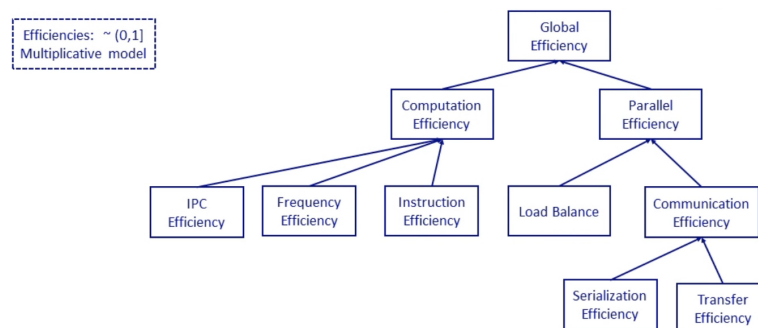


Figure 15: Fundamental performance factors in evaluating performance

A.2.7 "Exascale challenges: the view from MaX" – Carlo Cavazzoni

For the [MaX CoE](#) (HPC for materials research and innovation), the goal of enabling the exascale transition involves the modernisation of community codes, making them ready to exploit future exascale system for material science simulations. The presentation initially focused on some of the exascale challenges. With Dennard scaling – constant power density despite transistors getting smaller – compute core frequency and performance no longer follow Moore's Law. A key issue for compute performance is how it can be increased with the least amount of power. In order to achieve this, chips that have been designed for maximum performance for all possible workloads (i.e. conventional CPUs) are increasingly being supplemented by new chips designed for maximum performance in a small set of workloads (e.g. many-core technologies).

It was shown that future exascale systems (with current technologies) will necessarily have 10^9 Floating Point Units (FPUs). This may be configured as 10^5 FPUs in 10^4 nodes, or 10^4 FPUs in 10^5 nodes. In either case, the use of MPI to distribute code to 10^4 or 10^5 nodes may not be the main issue, but how applications make use of the 10^4 or 10^5 FPUs, i.e. many-core technologies, within single nodes. Furthermore, exascale is not only about scalability and flops performance, but moving data in and out of 10^9 FPUs poses tremendous challenges based on current technology. In addition, effective exploitation of exascale will have to contend with heterogeneous architectures and deep memory hierarchies compared to today, and considerably more attention paid to workloads and workflows.

As an example of the CoE's activities on applications, some of the core modules from the Quantum Espresso software package have been factored out and transformed into "mini-apps", self-contained ready-for-deployment mini applications that can be used to guide development of future hardware. The advantage in developing these mini-apps, although time and effort consuming, is that it makes it much easier for designers of future hardware to study key aspects of scientific applications without having to deal with typically very large codebases. MaX is also actively engaged in profiling efforts (in collaboration with POP), and the implementation of novel OpenMP and MPI features into some of its key applications.

A.2.8 "Exascale challenges: the view from NoMAD" – Claudia Draxl

The [NoMAD CoE](#) presentation focused on some of the big data challenges for materials research towards the exascale era, where the amount of data produced on workstations, compute clusters and supercomputers is growing exponentially but most are thrown away. An overview of materials data and their structure was shown (Fig.16), and an example was provided where the calculation for a single thermoelectric figure (at level IV) involves the generation of large amounts of intermediate data (at levels I thru III). In order to allow researchers to better exploit such data, the NoMAD repository is being established to host, organise and share materials data. It accepts input and output files from all major codes, and contains over 5 million entries at the time of this report. This has facilitated, for example, studies in DFT calculations of solids, where results from different electronic calculation software can be compared in order to assess data quality.

| Level | Properties | Methods | Size |
|-------|--|---|---------------------|
| I | Atomic positions and nuclear charges, properties of free atoms, symmetry, temperature, pressure | Input: definition of material <i>gene</i> | 10 kB - 10 MB |
| II | Total energy, electron density, potential, wavefunctions, atomic forces, optimized geometry, elastic constants, etc. | Density-functional theory (DFT) and <i>ab initio</i> molecular dynamics (MD) | 10 MB - 10 TB |
| III | Excitation energies, dielectric screening, matrix elements of Coulomb interaction, etc. optical spectra, electrical conductivity, phonon spectra, thermal conductivity, etc. | Many-body perturbation theory (MBPT), DF perturbation theory, <i>ab initio</i> MD | 1 GB - 1 TB |
| IV | Efficiency of solar cell, thermoelectric figure of merit, turn-over frequency of catalyst, etc. as a function of temperature and pressure | Modeling, output derived from levels I-III <i>phenotype</i> | 10 kB - 1 MB |

Figure 16: Overview of materials data and their structure

Apart from the repository, a NoMAD Encyclopedia has been developed that provides an easy way for researchers to explore properties of given materials that have been previously computed, complemented by visualisation tools. Going further, the NoMAD Analytics Toolkit allows researchers to study correlations and structure in the data repository, enabling scientists and engineers to identify materials for potential use in novel products. In summary, the approach towards exascale is very much data-oriented, i.e. how to improve on ways to handle and better exploit the exponential increase in data quantity and complexity.

A.2.9 "Exascale challenges: the view from EoCoE" – Matthieu Haefele

[EoCoE](#) is an energy oriented Centre of Excellence with four main thematic pillars: meteorology, materials, water and fusion all supported by a transversal group focused on advanced maths linear algebra and HPC tools and techniques. Some of their contributions towards exascale include design of numerical schemes, software package improvements and some efforts on porting applications to new architectures. They also provide support for performance evaluations for the different communities.

With regards to exascale software stack improvements, the CoE has in-house expertise across different areas such as numerical method improvements, linear algebra packages (e.g. parallel sparse direct solvers, hybrid solvers, including promotion of European linear algebra technologies), parallel I/O (e.g. FTI, XIOS, SIONlib, PDI). On application performance, EoCoE has defined 28 performance metrics (Fig.17), and automated and reproducible methods to collect them using JUBE.

In collaboration with POP, EoCoE holds performance evaluation workshops that brings both code developers and HPC experts together. During the workshop, both groups work together to carry out the performance analyses, generate the performance metrics and producing the performance report. This allows the code developers to gain knowledge on performance tools and the capability to re-run the performance evaluation. Through this type of approach, it has been shown that the resulting performance improvements have saved over 40 million core hours for one study alone (2.5× speed-up), while another case where a 12× speed-up has paved the way for simulations of larger systems.

However, the author (not necessarily the view across EoCoE) has raised some concerns about the "mini-app" route to exascale that are being undertaken by some. The argument is that while the mini-app itself may be factored out of an application and adapted for exascale systems, re-integration of these mini-app back into the applications can often be problematic (e.g. the physics may need to change when executed on new architectures, breaking the original relationship to the code factored out into the mini-app). The proposed approach, then, is to concentrate resources on

| | | |
|--------|-----------------------------------|------------|
| | Metric name | 03/01/2016 |
| | Test-case | case1 |
| Global | Total Time (s) | 43.2 |
| | Time IO (s) | 0.3 |
| | Time MPI (s) | 12.4 |
| | Memory vs Compute Bound | 1.1 |
| | Load Imbalance MPI | 24.8 |
| | IO Volume (MB) | 35.8 |
| IO | Calls (nb) | 384000 |
| | Throughput (MB/s) | 105.0 |
| | Individual IO Access (kB) | 0.1 |
| | P2P Calls (nb) | 0 |
| MPI | P2P Calls (s) | 0.0 |
| | P2P Message Size (kB) | 0.0 |
| | Collective Calls (nb) | 2721 |
| | Collective Calls (s) | 0.1 |
| | Collective Message Size (kB) | 908.4 |
| | Synchro / Wait MPI (s) | 11.7 |
| | Ratio Synchro / Wait MPI | 94.8 |
| | Time OpenMP (s) | 0.0 |
| Node | Ratio OpenMP | 0.0 |
| | Time Synchro / Wait OpenMP | 0.0 |
| | Ratio Synchro / Wait OpenMP | 0.0 |
| | Memory Footprint (B) | 66 mB |
| Mem | Cache Usage Intensity | N.A. |
| | IPC | N.A. |
| Core | Runtime without vectorisation (s) | 46.5 |
| | Vectorisation eff ciency | 1.1 |
| | Runtime without FMA (s) | 44.6 |
| | FMA eff ciency | 1.0 |

Figure 17: EoCoE Performance metrics table

a small number of applications, centred on key scientific projects, and start already the port of relevant parts of these applications (holistically) on new architectures.

References

Acronyms Used

CECAM Centre Européen de Calcul Atomique et Moléculaire

HPC High Performance Computing

HTC High Throughput Computing

HPDA High Performance Data Analysis

PRACE Partnership for Advanced Computing in Europe

ESDW Extended Software Development Workshop

WP Work Package

EsD Extreme-scale Demonstrators

MPI Message Passing Interface

PGAS Partitioned Global Address Space

CoE Center of Excellence

FPUs Floating Point Units

IP Intellectual Property

EPI European Processor Initiative

GPP General Purpose Processor

ALL A Load-balancing Library

JSC Jülich Supercomputing Centre

URLs referenced

Page ii

<https://www.e-cam2020.eu> ... <https://www.e-cam2020.eu>

<https://www.e-cam2020.eu/deliverables> ... <https://www.e-cam2020.eu/deliverables>

Internal Project Management Link ... <https://redmine.e-cam2020.eu/issues/47>

a.ocais@fz-juelich.de ... <mailto:a.ocais@fz-juelich.de>

<http://creativecommons.org/licenses/by/4.0> ... <http://creativecommons.org/licenses/by/4.0>

Page iii

E-CAM Extreme-Scale State-of-the-Art Workshop ... <https://www.cecamlab.org/workshop-2-1512.html>

Page 2

PASC18 ... <https://pasc18.pasc-conference.org/>

Page 3

Eurolab4HPC Long-Term Vision on High-Performance Computing ... <https://www.eurolab4hpc.eu/media/public/vision/D2-2--final-vision.pdf>

Page 5

RISC-V ... <https://en.wikipedia.org/wiki/RISC-V>

announcement of 1.5 exaflop "Frontier" exascale system ... <https://www.olcf.ornl.gov/frontier/>

Intel X^e architecture ... <https://itpeernetwork.intel.com/intel-xe-compute/#gs.ev5wh0>

Aurora A21 exascale system ... <https://www.anl.gov/article/us-department-of-energy-and-intel-to-deliver-1>

FPGAs ... <https://www.xilinx.com/products/silicon-devices/fpga/what-is-an-fpga.html>

ARM+FPGA Exascale Project ... <https://www.hpcwire.com/2017/09/07/eu-funds-20-million-euro-armfpga-exascale/>

ExaNeSt ... <http://www.exanest.eu/>

EcoScale ... <http://www.ecoscale.eu/>

ExaNoDe ... <http://www.exanode.eu/>

CUDA 10.0 ... <http://docs.nvidia.com/cuda/cuda-c-programming-guide/index.html>

OpenMP 5.0 ... <https://www.openmp.org/wp-content/uploads/OpenMP-API-Specification-5.0.pdf>

OpenACC open standard ... <https://www.openacc.org/specification>
 Unified Virtual Addressing ... <https://devblogs.nvidia.com/parallelforall/beyond-gpu-memory-limits-unified>
 Tensor Core ... <https://devblogs.nvidia.com/parallelforall/cuda-9-features-revealed>
 NVidia education site ... <https://developer.nvidia.com/cuda-education>
 presentation on performance of the Clang OpenMP 4.5 implementaion on NVIDIA gpus ... <http://on-demand.gputechconf.com/gtc/2016/presentation/s6510-jeff-larkin-targeting-gpus-openmp.pdf>

Page 6

EoCoE ... <https://www.eocoe.eu/>
 June 2018 webinar on FPGA computing ... <https://youtu.be/ptN67kwLpBM>
 EU HPC policy ... <https://ec.europa.eu/digital-single-market/en/policies/high-performance-computing>
 EuroHPC ... <https://ec.europa.eu/digital-single-market/en/eurohpc-joint-undertaking>
 Hosting Entities for Precursors to Exascale Supercomputers ... <https://eurohpc-ju.europa.eu/participate.html>
 Hosting Entities for Petascale Supercomputers ... <https://eurohpc-ju.europa.eu/participate.html>
 PRACE calls ... <http://www.prace-ri.eu/call-announcements/>
 DECI calls ... <http://www.prace-ri.eu/dec1-13-call/>

Page 8

E-CAM Survey of Application Software ... <https://docs.google.com/forms/d/e/1FAIpQLSc9i-vb8VNLm-KqC7Wy4i6d1m/viewform?c=0&w=1>
 CECAM website ... <https://www.cecarn.org>

Page 10

ISO/IEC standard for the C++ programming language ... <https://www.iso.org/standard/68564.html>
 Standard Template Library ... https://en.wikipedia.org/wiki/Standard_Template_Library
 multi-threading programming model for C++ ... https://en.wikipedia.org/wiki/C%2B%2B11#Multithreading_memory_model
 continued introduction of expert-level features into C++ may drive away newcomers ... https://www.theregister.co.uk/2018/06/18/bjarne_stroustrup_c_plus_plus/
 guidelines to help people adopt modern C++ ... <https://github.com/isocpp/CppCoreGuidelines/blob/master/CppCoreGuidelines.md>
 Fortran 2018 ... <http://fortranwiki.org/fortran/show/Fortran+2018>
 coarray ... https://en.wikipedia.org/wiki/Coarray_Fortran
 Software Engineering and Parallel Programming in Modern Fortran ... <https://www.cranfield.ac.uk/courses/short/aerospace/software-engineering-and-parallel-programming-in-modern-fortan>
 Advanced Fortran Programming ... <https://events.prace-ri.eu/event/852/>
 compiler support for the latest Fortran standards ... <http://fortranwiki.org/fortran/show/Compiler+Support+for+Modern+Fortran>

Page 11

Dask ... <https://dask.org/>
 jobqueue_features ... https://github.com/E-CAM/jobqueue_features
 Python 2 will stop being maintained in 2020 ... <https://pythonclock.org/>
 GASNet ... <https://gasnet.lbl.gov/>
 MPI-3.1 ... <http://mpi-forum.org/docs/mpi-3.1/mpi31-report.pdf>
 scope of past and future updates to the MPI standard ... https://www.lrz.de/services/compute/courses/x_lecturenotes/Parallel_Programming_Languages_Workshop/MPI.pdf
 level of OpenMP support among other compilers ... <http://www.openmp.org/resources/openmp-compilers/>
 OpenACC ... <https://www.openacc.org/>
 nvcc compiler ... <http://docs.nvidia.com/cuda/cuda-compiler-driver-nvcc/index.html>

Page 12

Vulkan ... [https://en.wikipedia.org/wiki/Vulkan_\(API\)](https://en.wikipedia.org/wiki/Vulkan_(API))
 SYCL ... <https://www.khronos.org/sycl/>
 Frontier ... <https://www.amd.com/en/products/frontier>
 HIP ... <https://gpuopen.com/compute-product/hip-convert-cuda-to-portable-c-code/>
 HPX ... <https://github.com/STELLAR-GROUP/hpx>
 ParalleX ... <http://stellar.cct.lsu.edu/pubs/icpp09.pdf>
 Kokkos ... <https://github.com/kokkos/kokkos>
 OmpSs ... <https://pm.bsc.es/ompss>
 Charm++ ... <http://charm.cs.illinois.edu/research/charm>
 charm4py ... <https://charm4py.readthedocs.io/en/latest/>

Page 13

Kokkos workshop ... <http://training.e-cam2020.eu/datasets/5bbb52d4e4b0d62afd1161c4>

Page 14

E-CAM Extreme-Scale State-of-the-Art Workshop ... <https://www.cecarn.org/workshop-2-1512.html>

European HPC Technology Strategic Research Agenda (SRA) ... <http://www.etp4hpc.eu/en/news/18-strategic-research.html>

Page 15

EasyBuild ... <http://easybuild.readthedocs.io/en/latest/>

Precursors to Exascale Supercomputers ... <https://eurohpc-ju.europa.eu/participate.html#inline-nav-1>

Page 16

PASC18 ... <https://pasc18.pasc-conference.org/>

jobqueue_features ... https://github.com/E-CAM/jobqueue_features

Page 17

OpenPathSampling ... <http://openpathsampling.org/latest/>

Dask ... <https://github.com/dask/dask>

DPD Scoping Workshop ... <https://www.e-cam2020.eu/event/scoping-workshop-dissipative-particle-dynamics-here...> https://www.e-cam2020.eu/wp-content/uploads/2018/09/SCOW_Dissipative-particle-dynamics_REPORT.pdf

transversal ESDW ... https://www.e-cam2020.eu/event/extended-software-development-workshop-intelligent?instance_id=57

second part of the HTC workshop ... <https://www.e-cam2020.eu/event/4424>

HPX ... <http://stellar-group.org/libraries/hpx/>

Page 19

E-CAM Extreme-Scale State-of-the-Art Workshop ... <https://www.cecarn.org/workshop-2-1512.html>

E-CAM Extreme-Scale State-of-the-Art Workshop ... <https://www.cecarn.org/workshop-2-1512.html>

Page 21

DBCsr library ... <https://dbcsr.cp2k.org/>

Page 23

POP CoE ... <https://pop-coe.eu/>

Page 24

MaX CoE ... <http://www.max-centre.eu/>

Page 25

NOMAD CoE ... <https://nomad-coe.eu/>

EoCoE ... <http://www.eocoe.eu/>

Citations

- [1] A. O’Cais, L. Liang, and J. Castagna, “Hardware developments iii,” Jul. 2018. [Online]. Available: <https://doi.org/10.5281/zenodo.1304088>
- [2] D. Borgis, L. Liang, L. Petit, M. Lysaght, and A. O. Cais, “Hardware Developments I - A Survey of State-of-the-art Hardware and Software,” Jul. 2016. [Online]. Available: <https://doi.org/10.5281/zenodo.929533>
- [3] L. Liang, A. O’Cais, J. Castagna, S. Wong, and G. Sanchez, “Hardware developments II,” Oct. 2017. [Online]. Available: <https://doi.org/10.5281/zenodo.1207613>
- [4] R. Friedman, “C++ Parallel STL Introduced in Intel Parallel Studio XE 2018 Beta,” May 2017. [Online]. Available: <https://insidehpc.com/2017/05/parallel-stl/>
- [5] T. Heller, P. Diehl, Z. Byerly, J. Biddiscombe, and H. Kaiser, “Hpx—an open source c++ standard library for parallelism and concurrency,” 2017. [Online]. Available: http://stellar.cct.lsu.edu/pubs/heller_et_al_opensuco_2017.pdf